







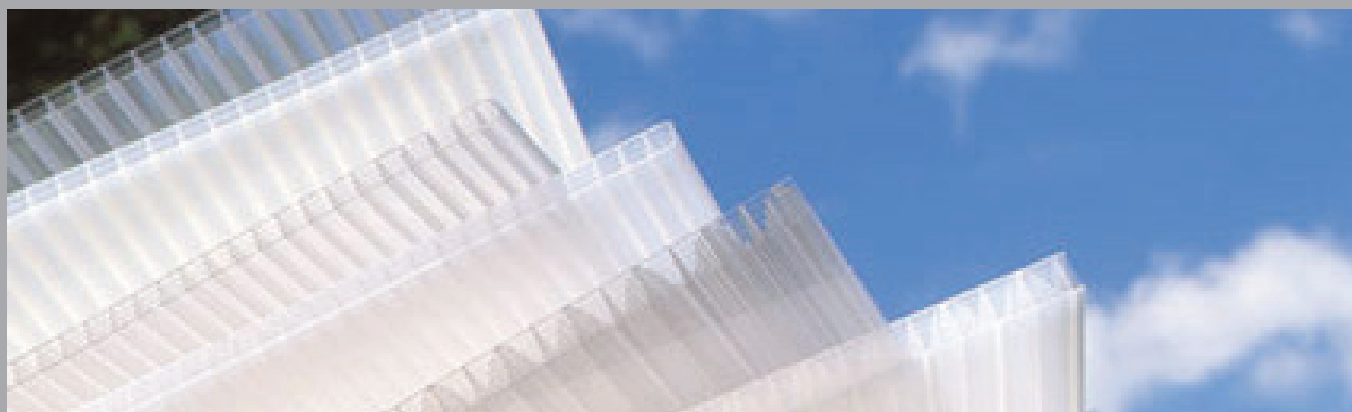




Plaques alvéolaires

Lexan Thermoclear (polycarbonate)

Type	Epaisseur mm	Valeur K	Poids	Transmission lumineuse	Largeurs mm	Longueurs mm
	6	3.5 W/m ² K	1.3 Kg/m ²	Transparent 82% Opalin 66 %	2100	3000 - 3500 6000 - 7000
	8	3.3 W/m ² K	1.5 Kg/m ²	Transparent 81% Opalin 64 %	1250 2100	2000 jusqu'à 5000/250 mm 6000 - 7000
	10 (2rs)	3.0 W/m ² K	1.7 Kg/m ²	Transparent 81% Opalin 64 %	1250 2100	2000 jusqu'à 5000/250 mm 6000 - 7000
	10 (5rs)	2.4 W/m ² K	1.75 Kg/m ²	Transparent 65% Opalin 60 %	1250 2100	2000 jusqu'à 5000/250 mm 6000 - 7000
	16 (3ts)	2.3 W/m ² K	2.7 Kg/m ²	Transparent 74% Opalin 63%	980 - 1050 2100 1250 - 2100	2000 - 2500 - 3000 3500 - 4000 - 4500 5000 - 6000 - 7000 3000 - 3500 - 6000 7000
	16 (5X)	1.88 W/m ² K	2.6 Kg/m ²	Transparent 59% Opalin 53%	980 - 1050 1250 - 2100	2000 - 2500 - 3000 3500 - 4000 - 4500 5000 - 6000 - 7000
	32 (5X)	1.1 W/m ² K	3.8 Kg/m ²	Transparent 55% Opalin 48%	980 - 1250	2500 - 3000 - 3500 4000 - 4500 - 5000 6000 - 7000 - 7500
	45 (9X)	0.875 W/m ² K	4.5 Kg/m ²	Opalin 42%	1200	3000 - 3500 - 4000 5000 - 6000 - 7000




Plaques alvéolaires



Multiwall (polycarbonate)

Type	Epaisseur mm	Valeur K	Poids	Transmission lumineuse	Largeurs mm	Longueurs mm
	16 (KB32)	2.5 W/m ² K	3.9 Kg/m ²	Transparent 85%	980	3000 - 3500 - 4000 6000 - 7000
	25	1.4 W/m ² K	3.4 Kg/m ²	Opalin 40 %	1250	3000 - 3500 - 4000 6000 - 7000

Lexan Thermoclear anti-chaleur (polycarbonate)

Type	Epaisseur mm	Valeur K Valeur ZTA	Poids	Transmission lumineuse	Largeurs mm	Longueurs mm
 Solar Control	45 (9X)	0.875 W/m ² K 40%	4.5 Kg/m ²	Opalin 45 %	1200	3000 - 3500 - 4000 5000 - 6000 - 7000

Sun Reflect anti-chaleur (polycarbonate)

Type	Epaisseur mm	Valeur K Valeur ZTA	Poids	Transmission lumineuse	Largeurs mm	Longueurs mm
	16 (5X)	2.1 W/m ² K 34%	2.55 Kg/m ²	Opalin 40 %	980 - 1250	2000 - 2500 - 3000 3500 - 4000 - 4500 5000 - 6000 - 7000 8500
	32 (7X)	1.2 W/m ² K 37%	3.7 Kg/m ²	Opalin 35 %	980 - 1250	2500 - 3000 - 3500 4000 - 4500 - 5000 6000 - 7000 - 8500